


1.




Open the lid of the carrying case by unlatching **the five snap locks** on the carrying case.

2.

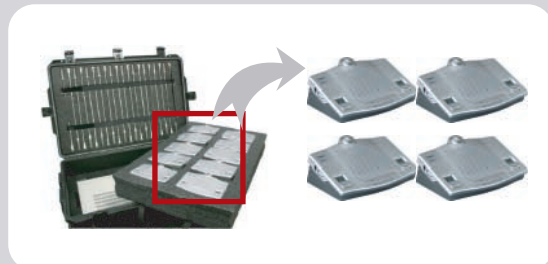

Take out each **delegate unit** and position on table where it will be used during the conference.

3.

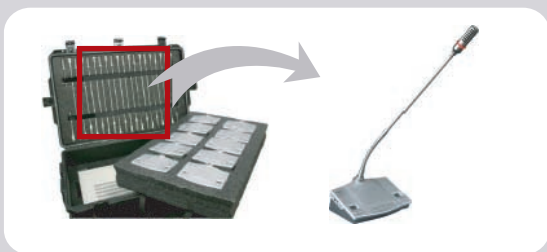


Remove **gooseneck microphones** from the lid of the carrying case and **screw onto delegate units**. (Be sure to line up pins before pushing microphone in)

4.




Remove **main unit** from carrying case and place on table.

5.

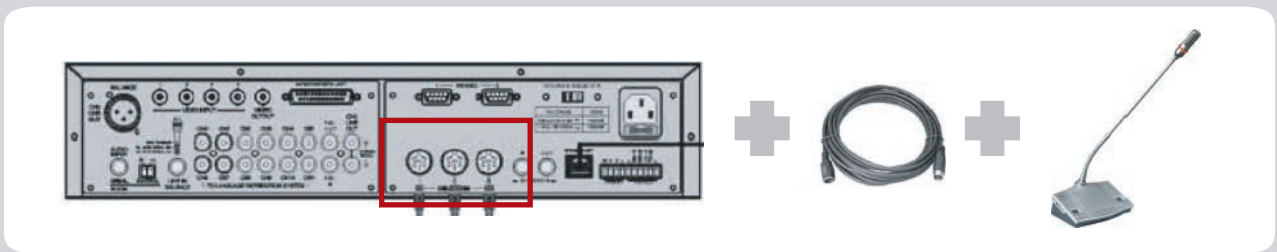

From the port on the back of the main unit **labeled "delegates"**, plug in 6-Pin DIN extension cable. **Connect the other end** of the extension cable into the first microphone unit in the daisy-chain

6.

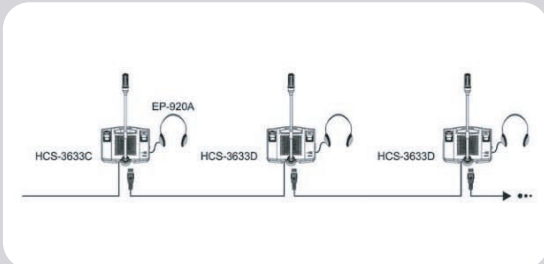

Connect remaining units by daisy-chaining with the cables already connected to each microphone unit.



7.



Power On

Plug in the main unit with the provided UPC and move the power button to the "on" position.


8.

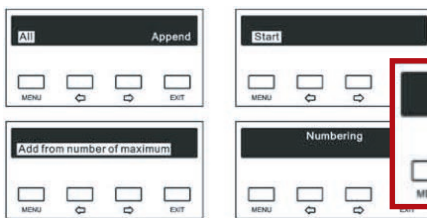

Flashing Push-to-Talk button

Numbering. Using the sub menu on the main unit, give each delegate station a number by entering the NUMBER mode and pressing each delegate's flashing push-to-talk button.

9.

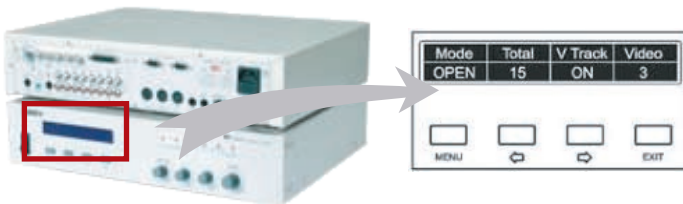

Mode:
Open / Override / Voice / Apply

Select preferred parameters on the main unit. (See functions section)